

Digital Engine®







Cost-Effective power for UHD Video Walls **DE6200**


AOPEN DE6200 is an entry-level commercial-grade 4K Digital Engine. It supports up to 3 displays, or one 4K display. Designed to resist dust and grease, the DE6200 is ideal for stores and QSR applications, including menu boards, digital ads, and order-processing displays.

Feature:

- + AMD R-Series Merlin Falcon processor for performance and security
- $+\ \mbox{AMD}$ Radeon 3rd-gen GCN for high quality visual graphics and visuals
- + Supports up to 3 HDMI displays
- + Entry-level 4K to one display
- + Remote device management and recovery
- + Windows and Linux OS

DE6200



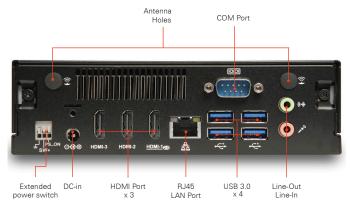

Model name		DE6200
Feature		Can support up to 3 independent HDMI outputs
Housing Material		SECC
Chassis Color		Black
Dimension	W x H x D (mm)	166 x 48 x 157 mm
	W x H x D (inch)	6.54 x 1.89 x 6.18 inch
Weight		2.0 kg / 4.4 lb
CPU/ Chipset	Туре	AMD Embedded R-series Merlin Falcon, RX-421BD 2.1-3.4 GHz Quad Core
Memory		Dual Channel, DDR4 SO-DIMM x 2, 1600 Mbps, max 16G
Graphics	Chip	AMD Radeon R7 series HD graphics
Expansion slot		M.2 2242 x 2, M.2 2230 x 1 (for wifi)
Audio	Туре	Realtek HD Audio ALC269Q
	Channel	Stereo
LAN		Realtek Gigabit Ethernet RTL8111H x 1 10/100/1000 Mbps
Storage		M.2 2242 x 2 2.5" SATA x 1

Front Panel IO	USB 2.0 Port		x 2	
	USB 3.0 Port		-	
	Others		-	
Rear Panel IO	DC Jack		x 1	
	HDMI Port		x 3	
	USB 2.0 Port		-	
	USB 3.0 Port		x 4	
	eSATA Port		-	
	RJ45 LAN Jack		x 1	
	Legacy RS232 Serial Port		x 1	
	Audio Set	Line-Out	x 1	
		Mic-in	x 1	
	Antenna Holes		x 2	
	Kensington Lock Hole		-	
	Others		Extended Power SW x 1	
Watchdog Timer			1 ~255 sec/min	
Adapter			19V/90W AC adapter	
Input Voltage			AC 100 ~240 V	
Environment				
МТВБ			50,000 hrs	
Operating Temperature			0 ~50 °C	
Storage Temperature			-30 ~60 °C	
Relative Humidity			95% RH	

Supports:











The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.