



Powered by the Chromebox Commercial 2 C-Tile 22 Gen2


The C-Tile 22 Gen2 to its expanding commercial Chrome portfolio. Powered by the AOPEN Chromebox Commercial 2 and built for 24/7 commercial environments, the commercial-grade C-Tile 22 Gen2 features a 22-inch screen that serves a range of self-service kiosk applications including check-in, ticketing, loyalty programs, and wayfinding, as well as a variety of DOOH applications.

C-Tile 22 Gen2 features:

- Front panel IP65 dust and water proof
- 21.5", 1920x1080 px (16:9) , 250 nits, VA panel
- Tamper proof design
- Fanless and solid-state design
- Glove touch support – Nitrile / Latex
- Chrome Device Management



C-Tile 22 Gen2

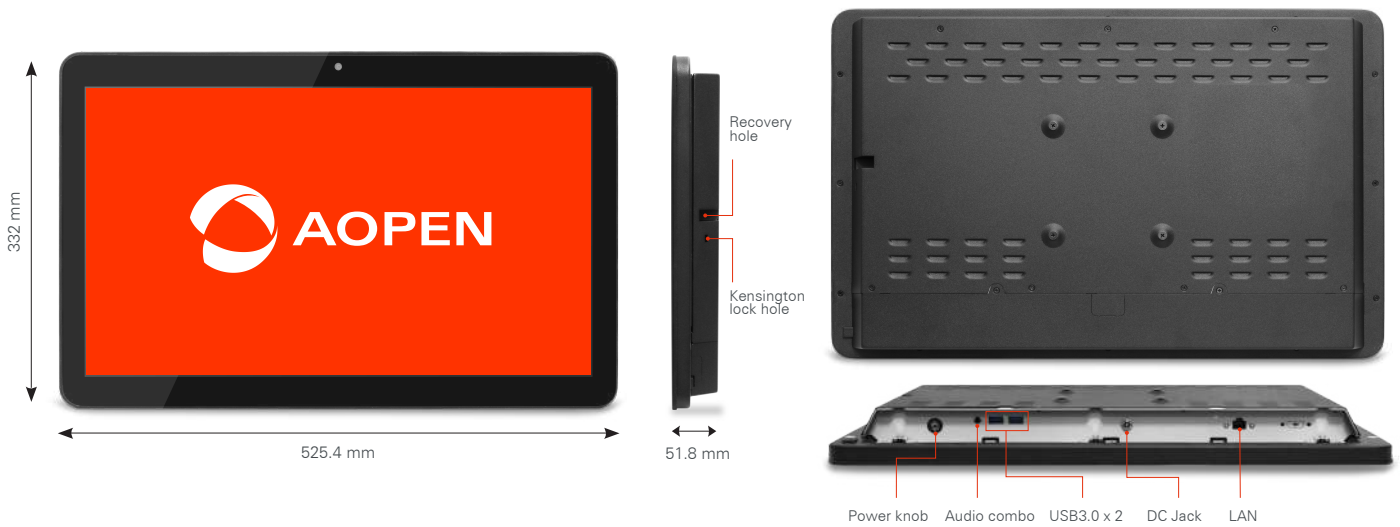

Model name		C-Tile 22 Gen2
Housing Material		Metal
Dimensions	W x H x D (mm)	525.4 x 332 x 51.8 mm
	W x H x D (inch)	20.7 x 13.1 x 2 inch
Weight		8.4 kg/ 18.5 Pound
CPU		Intel Kaby Lake - Celeron
Memory		Dual Channel, DDR4, 2666MHz, 4GB
Graphics		Intel HD graphic, integrated on CPU
Front Panel	Resolution	21.5" 1920 x 1080 (16:9)
	Maximum Brightness	250 nits
	Panel Type	VA
	Viewing angle	178°/178°
	Response time	25ms
	Contrast Ratio	3000:1
	Touch	PCT (10 points)
Audio		Maxim MX98090
LAN		Giga LAN x 1, 10/100/1000 Mbps

Storage		M.2 SSD 32G
Security		Google TPM, Kensington lock
Rear Panel I/O	Power Button	x 1
	DC Jack	x 1
	HDMI Out Port	x 1 (Option)
	USB 3.0 Port	x 2
	Audio Set	Audio Combo Jack x 1
	Line-Out	
	Mic-in	
	Others	Recovery button x 1
IP Grade		Front IP65 / Rear IPX2
Adapter		90W 19V 4.74A x 1
Input Voltage		AC 110 ~ 240V
Warranty		1 year
Environment		
MTBF		50000 hours
Operating Temperature		0 ~ 40°C (32 ~ 104°F)
Storage Temperature		-20 ~ 60°C (-4 ~ 140°F)
Relative Humidity		90% RH max

Supports:



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.