


Industrial Engine





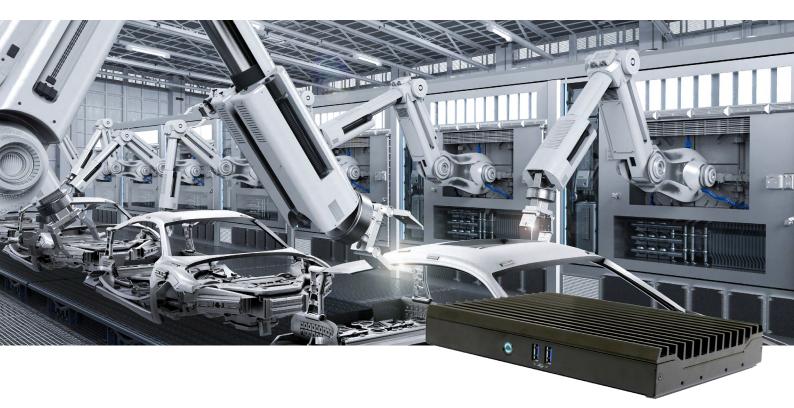

Rugged design for industrial applications in harsh environments **DEX5550-W**

The DEX5550-W is a fanless Industrial Engine, based on the DEX5550. With a high operating temperature and the fact that the DEX5550-W withstands shocks, make this device perfect for demanding environments, such as factories. The 7th generation Intel® Core™ CPU is powerful and ensures a stable, high-end operating player which functions 24/7. Specifically designed for quality control and industrial automation.

The DEX5550-W features:

- + Rugged and fanless design
- + Suitable for industrial automation and quality control
- + Supports TPM 2.0
- + Wide operating temperature range (-20 $^{\circ}$ \sim 60 $^{\circ}$ C)

DEX5550-W



Model name		DEX5550-W	
Features			
Dimension	W x H x D (mm)	240 x 35 x 158 mm	
	W x H x D (inch)	9.44 x 1.38 x 6.22 inch	
Weight	Net Weight	1.82 kgs / 4.01 lbs	
	Gross Weight	2.05 kgs / 4.52 lbs	
Mechanical	Housing	Aluminium + SECC	
	Mounting	L Type Wall Mount	
Supports OS		Windows 10 IoT	
IoT SW integration (AiCU)		-	
Certification		FCC, CE, LVD, CCC, BSMI	
Warranty		3 Years	
Specifications			
Processor	СРИ	7th Generation Intel® Core™ (i3, i5)	
	L2 Cache	6MB	
	BIOS	AMI UFEI	
Memory	Onboard	-	
	Expansion	DDR4 (x 2), 2133Mhz, up to 32GB	
Graphics	Chipset	Intel® Core™	
		Intel® HD Graphics 610 / 620 / 640	
Expansion slot		M.2 2230 x 1, M.2 2242 x 2	
Ethernet	Chip	Intel Gigabit x 2 (i210 x 1, i219 x 1)	
	Speed	10 / 100 / 1000 Mbps	

Storage	2.5" SSD	-		
	mSATA	-		
System I/O	DC Jack	x 1 (12 / 19V, 5517)		
	Graphics Port	x 2 (HDMI2.0)		
	USB 2.0 Port	-		
	USB 3.0 Port	x 2		
	RJ45 LAN	x 2		
	Audio	Line-out x 1		
	Antenna Holes	x 2		
	COM Port	x 2		
	Other	Extended Power Switch x 1 USB3.1 x 2		
Power Requirement	Input Voltage	DC 12 ~ 19V		
	Power Adapter	19V / 6.32A 120W		
Power Consumption	Typical	15W		
	Мах	15W		
Environment				
Operating Temperature		-20 ∼ 60°C		
Storage Temperature		-30 ~ 70°C		
Relative Humidity		90% RH (55°C Non-Condensing)		
Vibration During Operation		1G / Random, 30min per axis in all 3 axes		
Shock During Operation		Half sine, 8G 11ms duration		
ЕМС		-		



Supports:



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.