

## Open Frame





# 23.8" Open Frame Display **Commercial Grade DT24VW2-O**

#### The features:

- 23.8", 1920 x 1080 resolutions
- 250nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK08 Impact Protection\*
- Quality panel for landscape, portrait mode
- VESA mounting holes 100 x 100mm and 100 x 200mm

\*IKO8 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm above the protect.

#### **Self-Service Kiosk**



**Industrial Monitor** 



#### **Smart Locker**



EMC and DoC









### DT2439C

### **Dimensions**

Unit: mm

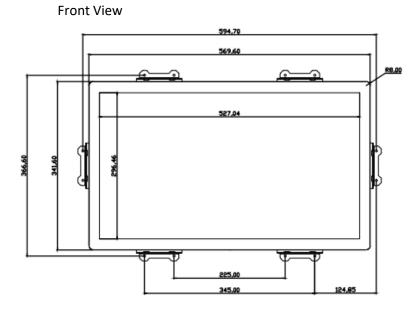



**Bottom View** 

**Rear View** 



### **Specifications**

DT24VW2-O			
Chassis	Mechanical Design	Metal with implanted IP design	
	Dimension (W x H x D)	569.6 x 341.6 x 49.9 mm	
Thermal Solution		Fanless technology	
Panel	Resolution	23.8", 16:9, 1920 x 1080, 60Hz	
	Туре	VA	
	Maximum Brightness	250cd/m2	
	Response Time	16ms	
	Contrast Ratio	3000:1	
	View Angle (Horizontal)	89/89	
	View Angle (Vertical)	89/89	
	Backlight	LED backlight	
Touch	Touch Glass	Projected capacitive touch, 23.8 inch, 3.0mm chemically strengthened glass, 7H	
	Touch Controller	10 points touch	
Temper ature	Operation	0°C ~ 50°C (32°F~ 122°F)	
	Storage	-20°C ~ 60°C (-4°F~ 140°F)	
OS of Driver Software Support		Windows, Linux and Android	

IP Level		IP65 (front)
I/O Interface On Rear Site		HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, DC-in for adapter
Net Weight		7.24 Kg
Mounting	Rear	100x100mm and 100x200mm VESA mount
	Side	Mounting brackets on all four sides
Input Voltage		DC input 12V/3A
Warranty		3 years
Environme	nt	
MTBF		50,000hrs demonstrated
Relative Humidity		90% RH (40°C non-condensing)
Certification		FCC / CE(Class B) / RoHS
Packing		
Dimension (Packing)		
Dimension (Pa	acking)	650 x 440 x 160 mm
Dimension (Pa	acking)	650 x 440 x 160 mm 11 Kg
·	O,	

<sup>\*</sup>Please note that product specifications are subject to change without notice



AOPEN Headquarter New Taipei City, Taiwan AOPEN America San Jose, USA **AOPEN Europe** Rosmalen, Netherland **AOPEN Australia** Melbourne, Australia **AOPEN Japan** Tokyo, Japan AOPEN China Shanghai, China