




All-in-One Interactive Touch Solution **eTILE-X15**

The eTILE-X15 is a fanless and thin 15.6" all-in-one touch display. Developed with digital signage and kiosk in mind. This multitouch display can be integrated in various commercial settings such as retail, hospitality and corporate environments. Its sleek design, protective bezel and modular features make this eTILE-X perfect for any though environment.

eTILE-X15 Features:

- + Running on Intel® Baytrail Processor
- + Wide viewing angle in landscape and portrait
- + Slim form factor (38 mm)
- + VESA 100 x 100
- + Front side IP65 - dust and water proof
- + Tamperproof because of hidden I/O ports
- + DB9 connector for RS232 connection
- + Protective bezel

eTILE-X15

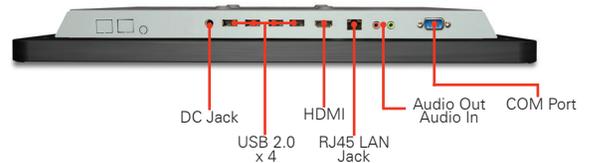

Model name		eTILE-X15FB		
Feature		Fanless all-in-one touchdevice		
Housing Material		Metal		
Dimension	W x H x D (mm)	395.1 x 244.6 x 38 mm		
	W x H x D (inch)	15.55 x 9.62 x 1.49 inch		
Weight		3.30kg / 7.27 lbs		
CPU		Supports Intel® BayTrail-M CPU Default configuration N2930		
Chipset		CPU Built-in		
Memory		Dual Channel, DDR3L SO-DIMM x2 1333MHz, Max 8GB		
Graphics	Chip	Integrated Intel® in CPU		
Panel	Resolution	15.6" 1920 x 1080		
	Maximum Brightness	250 nits		
	Panel Type	Twisted Nematic Panel		
	Viewing angle	Horizontal	80/80	
		Vertical	80/80	
	Response time	25ms		
	Contrast Ratio	700:1		
Touch	10 points PCT multi-touch			
Expansion slot		Mini Card Slot x2		
Audio	Type	Realtek HD Audio Codec ALC269		
	Channel	2 Channel		
LAN		Realtek RTL8111G 10/100/1000		
Storage		mSATA SSD (optional) Default 64GB		
Security		Kensington Lock Hole		

System I/O	DC Jack	x 1	
	HDMI Port	x 1	
	USB 2.0 Port	x 4	
	RJ45 LAN Jack	x 1	
	PC Legacy RS232 Serial Port	x 1	
	Audio Set	Line-Out	x 1
		Mic-in	x 1
	Antenna port	x 2	
	Watchdog Timer	1 ~ 255 sec./Min	
IP Grade	IP65		
Adapter	65W (19V, 3.42A) AC adapter		
Input Voltage	AC 100 ~ 240V		
Environment			
MTBF	45,000 hrs		
Operating Temperature	0 ~ 35°C		
Storage Temperature	-20 ~ 60°C		
Relative Humidity	90% RH (40°C non-condensing)		

Supports:



The specifications depicted may be subject to change without prior notice.
All trademarks are copyright of their respective owners. © AOPEN Inc.